


POWERFAB

EXCAVATOR & LOADER RANGE FOR A BIG PERFORMANCE IN SMALL SPACES!

1.2 to 1.7 TON DIGGING FORCE
2.3M (7'6") DEPTH OF DIG
WIDTH FROM 0.7M (2'3½") to 1.0M (3'3½")



1700X
360° SLEW

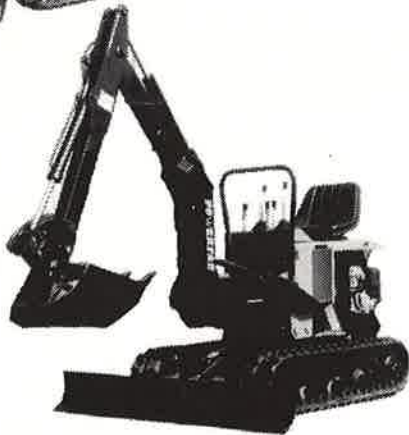

180C
180° SLEW



WALKER
SELF TRAILERING



125WTD
SKID STEER DRIVE
SELF TRAILERING



1700C
CLIMBER 360° SLEW



BACK HOE
180° SLEW

180A

CAN BE FITTED TO
12 HP TO 40 HP TRACTORS



SKID STEER LOADER
SELF TRAILERING

300

WIDTH 0.76M (2'6")
TO 1.0M (3'3½")

LIFT HEIGHT 2M (6'6")
PAYLOAD 225 Kg. (495 lb)

QUICK RELEASE ATTACHMENTS, BUCKETS, BREAKERS,
TRENCHERS, POLE HOLE BORERS, GRAPPLES, BROOMS ETC.

POWERFAB Sales & Spares Ltd.

FAIR VIEW, ASHVALE, TREDEGAR, GWENT, NP2 3HA, U.K.

TEL: (0495) 256627 TELEX: 498973 POWFAB G FAX: (0495) 718162

Write or phone for full specification and price
information pack — 24 hour service.

CONTRACTORS TO THE MINISTRY OF DEFENCE


SPECIFICATIONS

EXCAVATORS

BUCKETS

A range of excavator buckets are available in widths ranging from 200mm to 600mm.

Special purpose attachments including grab, face shovels, grave dig buckets, and back fill blades are also available.

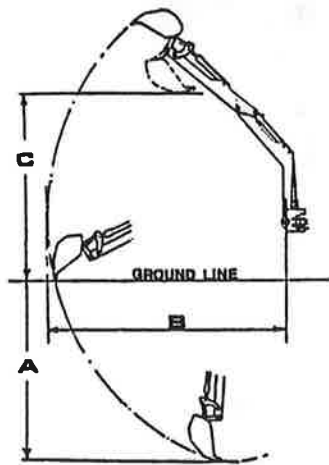

OPERATING DIAGRAM

ANCILLARY EQUIPMENT

The optional H.P.T.O. connections enable you to power a range of hydraulically operated implements including hand and machine held breakers, circular and chain saws, drills, pole hole borers, brushes, water pumps, pruners, concrete saws etc.

OPTIONAL EXTRAS

Hydraulic power take off.
11 & 15HP machines.
Full cab all steel construction.
Half cab all steel construction.
Telescopic bucket arm.

MACHINE Type	125WT (5HP)	125WT (8HP)	125WT (11HP)	125WTD (8HP)	125WTD (11HP)	180A	1700X	1700C	180C
A Dim ^o	2.3m	2.3m	2.3m	2.3m	2.3m	2.3m	2.4m	2.3m	2.4m
B Dim ^o	2.76m	2.76m	2.76m	2.76m	2.76m	3.1m	3.1m	3.1m	3.1m
C Dim ^o	2.10m	2.10m	2.10m	2.10m	2.10m	2.2m	2.2m	2.2m	2.2m
SLEWING Angle	130°	130°	130°	130°	130°	180° FULL	360° CONTINUOUS	360° CONTINUOUS	180° FULL
ENGINE (Standard)	5HP HONDA Air Cooled Petrol	8HP HONDA Air Cooled Petrol	11HP HONDA Air Cooled Petrol	8HP HONDA Air Cooled Petrol	11HP HONDA Air Cooled Petrol	POWERED BY Tractor	21HP LISTER PETTERS Water Cooled Diesel Electric Start	21HP LISTER PETTERS Water Cooled Diesel Electric Start	11HP HONDA Air Cooled Petrol
ENGINES (optional)		9HP YANMAR Air Cooled Diesel 9HP HONDA Air Cooled Diesel	9HP YANMAR Air Cooled Diesel 9HP HONDA Air Cooled Diesel	9HP YANMAR Air Cooled Diesel 9HP HONDA Air Cooled Diesel	9HP YANMAR Air Cooled Diesel 9HP HONDA Air Cooled Diesel				9HP YANMAR Air Cooled Diesel 9HP HONDA Air Cooled Diesel
APPROX. Weight	0.59 Tonne	0.62 Tonne	0.69 Tonne	0.69 Tonne	0.74 Tonne	0.7 Tonne	1.3 Tonne	1.3 Tonne	0.88 Tonne
MIN Width	0.7m	0.7m	0.7m	0.7m	0.7m		0.96m	1.0m	1.0m

SPECIFICATIONS

300 SKID STEER LOADER

TECHNICAL INFORMATION

- WEIGHT OF MACHINE : 0.74 tonne.
- RATED CAPACITY : 225kg Max.
- MAX. SPEED : 4.3kph on 23" dia. wheels.
- BUCKET CAPACITY : In accordance to SAE standard No. J818A.
- STANDARD TYRE : 6 x 12 4 ply (23" dia. approx.). Where other tyres are required contact powerfab design department.
- OPERATION (drive) : Steering and drive, forward and reverse, controlled by two levers, indirect hydrostatic drive to wheels with 3:1 mechanical reduction.
- ENGINE (standard) : Briggs and Stratton 15hp petrol engine with recoil start.

ATTACHMENTS

A choice of buckets and special purpose attachments are available. The attachments include trenchers, Manure forks, Grapple forks, Post hole borers, Rotary brushes, Pallet forks etc.

ANCILLARY EQUIPMENT

The optional H.P.T.O. connections enable you to power a range of hydraulically operated implements including breakers, Circular and Chain saws, Drills, Water pumps, Pruners etc.

SPECIAL FEATURES (optional extras)

HYDRAULIC P.T.O., TACHOMETER, FLOTATION TYRES, LIGHTS AND TRACKS.

